




Product Features

- ◆ Newly Designed 17" Embedded Industrial-Grade LCD Monitor
- ◆ Resistive Touchscreen (Optional)
- ◆ Advanced Structural Design with Flexible and Easy Installation

Specifications

Display	17" TFT LCD Screen
Structure	Steel chassis with sandblasted anodized aluminum panel, dustproof & shockproof
Panel Color	Black
Input Signal	Analog VGA/DVI Signal
Touchscreen	5-Wire Resistive (RS-232/USB Interface)
Control Interface	Membrane Keypad with OSD Function
Max Resolution	1280×1024
Contrast Ratio	1000:1
Brightness	250 cd/m ²
Power Supply	External DC 12V (Optional 6~30V)
Power Consumption	≤ 30W
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 65°C
Operating Humidity	20%~90% RH
Storage Humidity	5%~95% RH (Non-Condensing)
Dimensions	430mm (W) × 350mm (H) × 45mm (D)
Cutout Dimensions	413mm (W) × 333mm (H)
Mounting Options	Embedded/Panel/Arm/Stand/VESA 100mm×100mm
IP Rating	IP65 (Dustproof & Water-Resistant)
Net/Gross Weight	4.6kg / 7.4kg
Accessories	Adapter, Power Cable, VGA Cable, RS-232 Serial Port Cable/USB Cable

Dimensions

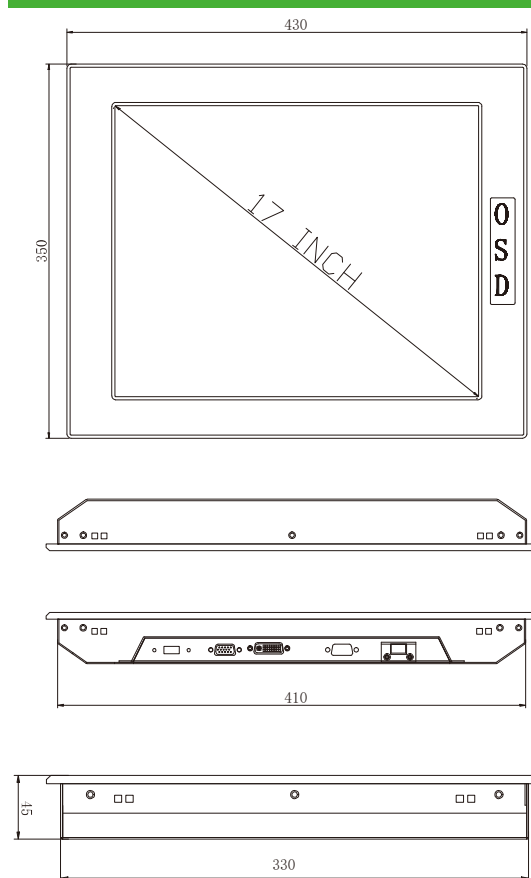

Ordering Information

Model	Specification
ADM-17TCU-C-XX	17" Industrial Touch LCD Monitor, RS-232 Serial Port Touch
ADM-17TCU-U-XX	17" Industrial Touch LCD Monitor, USB Touch
ADM-17NCU-XX	17" Industrial LCD Monitor, Non-Touch