

ADM-12TCU




Product Features

- ◆ 12.1" High-Brightness LCD Screen
- ◆ Resistive Touchscreen
- ◆ High-Strength Aluminum Alloy Panel with Sandblasted & Anodized Finish

Specifications

Display	12" TFT LCD Screen
Structure	Steel Chassis with Sandblasted Aluminum Panel, Dust proof & Shock proof
Panel Color	Black
Input Signal	Analog VGA/DVI Signal
Touchscreen	RS-232/USB ports , 5-Wire Resistive Touchscreen
Control Interface	Membrane Keypad with OSD Function
Max Resolution	1024×768
Contrast Ratio	800:1
Brightness	350 (cd/m2)
Power Supply	External DC 12V Input (Optional 6~30V Wide Voltage)
Power Consumption	≤ 30W
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 65°C
Operating Humidity	20 ~ 90%
Storage Humidity	5 ~ 95%,Non-Condensing
Dimensions	330mm (W) × 256mm (H) × 44mm (D)
Cut-out Dimensions	316mm (W) × 242mm (H)
Mounting	Embedded Panel/Arm/Stand/VESA 100mm×100mm
IP Rating	IP65
Net/Gross Weight	3.6kg/5.8kg
Accessories	Adapter, Power Cable, VGA Cable, RS-232 Cable, USB Cable

Dimensions

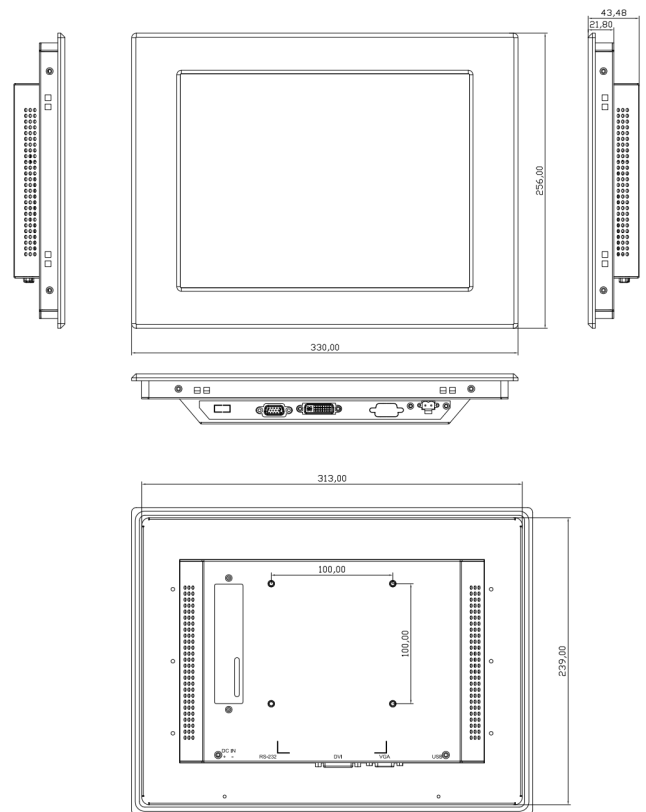

Ordering Information

Model	Specification
ADM-12TCU-C-XX	12" Industrial Touch LCD Monitor (Serial Port Touch Interface)
ADM-12TCU-U-XX	12" Industrial Touch LCD Monitor (USB Touch Interface)
ADM-12NCU-XX	12" Industrial LCD Monitor (Non-Touch)