


KINO-DH610

Mini-ITX SBC supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU, DDR3, VGA/DVI-D/HDMI, dual PCIe GbE, USB 2.0, SATA 3Gb/s, HD Audio and RoHS

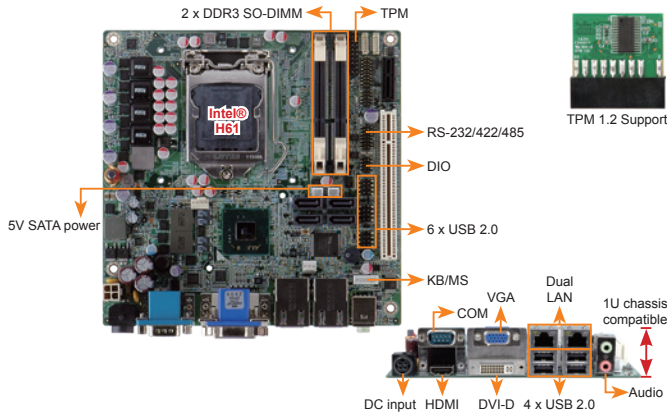

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® dual-core processor (TDP 65W max.)
- ◆ Chipset: Intel® H61
- ◆ Memory: Two 204-pin 1066/1333 MHz dual-channel unbuffered DDR3L SDRAM SO-DIMM support up to 16 GB
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support; LAN2: Realtek RTL8111E PCIe GbE controller
- ◆ Graphics Engine: Supports DX10.1 and OpenGL 3.0; Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual display supported; 1 x VGA (up to 2048x1536@75Hz); 1 x HDMI (up to 1920x1200@60Hz); 1 x DVI-D (up to 1920x1200@60Hz)
- ◆ External I/O Interface: 1 x RS-232; 4 x USB 2.0
- ◆ Internal I/O Interface: 1 x KB/MS (1x6 pin); 1 x RS-232/422/485 (2x7 pin, P=2.0); 2 x SATA power connector; 4 x SATA 3Gb/s; 6 x USB 2.0 (2x4 pin, P=2.54)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ Audio: Realtek ALC662 HD codec; 2 x Audio jacks (line-out, mic-in) on rear I/O
- ◆ Expansions: 1 x PCI slot; 1 x PCIe x1 slot
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Fan Connector: 1 x CPU smart fan (1x4 pin); 1 x System fan (1x3 pin)
- ◆ Power Supply: Maximum input voltage range: 9V ~ 28V; Recommended operating input voltage range: 12V ~ 24V; 1 x External DC jack (4-pin DIN); 1 x Internal power connector (2x2 pin)
- ◆ Power Consumption: 12V@5.07A (2.2GHz Intel® G620T with two 1066 MHz 2 GB DDR3 memory running 3DMark06 burn in); 12V@8.85A (2.8GHz Intel® Core™ i7-2600S with two 1066 MHz 2 GB DDR3 memory running 3DMark06 burn in)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170 mm x 170 mm
- ◆ Weight: GW: 1100g / NW: 700g
- ◆ CE/FCC compliant

Packing List


1 x KINO-DH610 single board computer	
1 x I/O shielding	1 x Mini jumper pack
2 x SATA with 5V power cable	1 x QIG

Ordering Information

Part No.	Description
KINO-DH610-R10	Mini-ITX SBC supports LGA1155 Intel® Core™ i5/i3/Pentium®/Celeron® CPU, DDR3, VGA/DVI-D/HDMI, dual PCIe GbE, USB 2.0, SATA 3Gb/s, HD Audio and RoHS
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-115XC-R10 CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-115XC-R10 CPU cooler
19800-003100-300-RS	Dual port USB cable with bracket, 300mm, P=2.54
19800-004300-100-RS	RS-232 & RS-422/485 cable with bracket, 14-pin to two DB-9, 250mm, P=2.0
32006-001100-201-RS	PS/2 KB/MS cable, 135mm, P=2.0
63040-010060-110-RS	12V 60W power adaptor with 4-pin DIN lock, 90 ~ 264VAC input, ErP
CF-115XA-R10	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-115XC-R10	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-115XD-R10	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-115XE-R10	High-performance LGA1155/LGA1156 cooler kit, 95W
SACF-KIT01-R10	SATA to CF converter board
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

KINO-AH612

Mini-ITX SBC supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with H61, DDR3, VGA/DVI-D, six COMs, dual PCIe GbE, SATA 3Gb/s, HD Audio and RoHS

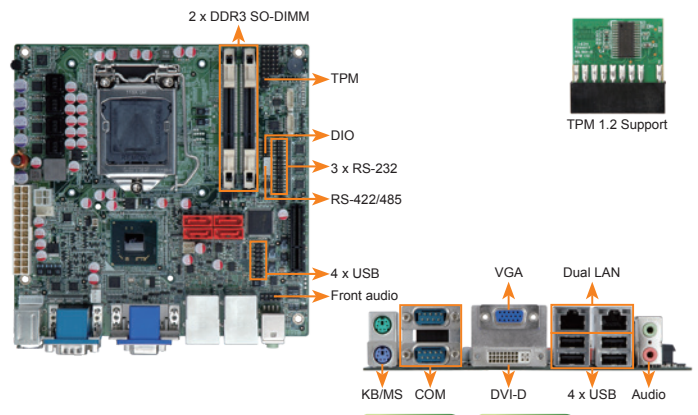

Features

- ◆ LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
- ◆ Dual-channel 1333/1066 MHz DDR3 supports up to 16 GB
- ◆ Supports dual independent display by VGA and DVI-D
- ◆ Supports six COM ports, four SATA 3Gb/s ports and one PCIe x4 slot for IO expansion card
- ◆ IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor
- ◆ Chipset: Intel® H61
- ◆ Memory: Two 204-pin 1066/1333 MHz dual-channel unbuffered DDR3L SDRAM SO-DIMM support up to 16 GB
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support
- ◆ Graphics Engine: Supports DX10.1 and OpenGL 3.0; Full MPEG-2, VC1, AVC Decode
- ◆ Display Output: Dual display supported; 1 x VGA (up to 2048x1536@75Hz); 1 x DVI-D (up to 1920x1200@60Hz)
- ◆ Audio: Realtek ALC662 HD codec; 2 x Audio jacks (line-out, mic-in) on rear I/O; 1 x Front Audio (2x5 pin)
- ◆ External I/O Interface: 1 x KB/MS; 2 x RS-232; 4 x USB 2.0
- ◆ Internal I/O Interface: 1 x KB/MS (1x6 pin); 4 x SATA 3Gb/s; 1 x RS-422/485 (1x4 pin, P=2.0); 3 x RS-232 (2x5 pin, P=2.0); 4 x USB 2.0 (2x4 pin, P=2.54)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ Expansion: 1 x PCIe x4 slot
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Fan Connector: 1 x CPU smart fan (1x4 pin); 1 x System fan (1x3 pin)
- ◆ Power Supply: ATX power supply; 5V@3.9A, 12V@0.36A, Vcore_12V@8.28A, 3.3V@1.24A, 5VSB@0.18A (3.4GHz Intel® Core™ i7-2600 with two 1333 MHz 2 GB DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170 mm x 170 mm
- ◆ Weight: GW: 1100g / NW: 700g
- ◆ CE/FCC compliant

Packing List

1 x KINO-AH612 single board computer	2 x SATA cable
1 x Dual RS-232 cable	1 x Mini jumper pack
1 x I/O shielding	1 x QIG

Ordering Information

Part No.	Description
KINO-AH612-R10	Mini-ITX SBC supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with H61, DDR3, VGA/DVI-D, 6 COM, dual PCIe GbE, SATA 3Gb/s, HD Audio and RoHS
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-115XC-R10 CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-115XC-R10 CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-115XC-R10 CPU cooler
19800-003100-100-RS	Dual port USB 2.0 cable with bracket, 300mm, P=2.54
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
CF-115XA-R10	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-115XC-R10	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-115XD-R10	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-115XE-R10	High-performance LGA1155/LGA1156 cooler kit, 95W
SACF-KIT01-R10	SATA to CF converter board
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17